


# Tapered Roller Bearings – Single Row

## Inch Series

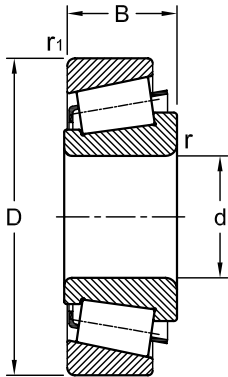

Dimensions					Load Rating		Designation
inch					kN		
d	D	B	r (mm)	r <sub>1</sub> (mm)	Dynamic (C)	Static (C <sub>0</sub> )	
0.5901	1.3775	0.4330	0.8	1.3	13.4	13.2	<b>K-A 4059/K-A 4138</b>
0.6250	1.6250	0.5625	1.3	2.0	22.0	21.2	<b>K-03062/K-03162</b>
	1.6875	0.5625	1.5	1.5	17.6	17.6	<b>K-11590/K-11520</b>
0.6875	1.5700	0.5450	1.3	1.3	21.2	20.8	<b>K-LM 11749/K-LM 11710</b>
0.7500	1.7810	0.6100	1.3	1.3	27.5	27.5	<b>K-LM 11949/K-LM 11910</b>
	1.9380	0.7100	1.3	1.3	39.1	40.0	<b>K-09067/K-09195</b>
	1.9380	0.7813	1.5	1.3	39.1	40.0	<b>K-09074/K-09195</b>
	1.9380	0.7813	1.3	1.3	39.1	40.0	<b>K-09078/K-09195</b>
	1.9380	0.8350	1.3	1.5	39.1	40.0	<b>K-09067/K-09196</b>
	1.9380	0.9063	1.5	1.5	39.1	40.0	<b>K-09074/K-09196</b>
	1.9380	0.9063	1.3	1.5	39.1	40.0	<b>K-09078/K-09196</b>
	2.1250	0.8750	1.5	2.3	39.6	39.0	<b>K-21075/K-21212</b>
	0.8120	1.9380	0.7813	1.5	1.3	39.1	40.0
1.9380		0.9063	1.5	1.5	39.1	40.0	<b>K-09081/K-09196</b>
0.8437	1.9687	0.6900	1.3	1.3	36.9	38.0	<b>K-M 12649/K-M 12610</b>
0.8656	1.7810	0.6100	1.3	1.3	27.5	31.0	<b>K-LM 12749/K-LM 12710</b>
	1.8100	0.6100	1.3	1.3	27.5	31.0	<b>K-LM 12749/K-LM 12711</b>
0.8750	2.0000	0.5910	1.5	1.5	28.1	30.5	<b>K-07087/K-07210 X</b>
	2.0625	0.7625	1.5	1.5	41.8	44.0	<b>K-1380/K-1328</b>
1.0000	1.9800	0.5600	1.3	1.3	26.0	30.0	<b>K-L 44643/K-L 44610</b>
	2.0000	0.5910	1.5	1.5	28.1	30.5	<b>K-07100 S/K-07210 X</b>
	2.0000	0.5910	3.3	1.5	28.1	30.5	<b>K-07100 SA/K-07210 X</b>
	2.2500	0.7650	1.5	1.5	39.6	45.0	<b>K-M 84548/K-M 84510</b>

d	Dimensions				Load Rating		Designation	
	inch				kN			
	D	B	r (mm)	r <sub>1</sub> (mm)	Dynamic (C)	Static (C <sub>0</sub> )		
	2.4409	0.7500	0.8	1.3	48.4	57.0	<b>K-15101/K-15245</b>	
	2.5000	0.8125	3.5	1.3	47.4	86.0	<b>15100/15250</b>	
	2.5000	0.8125	0.8	1.5	48.4	57.0	<b>K-15101/K-15250 X</b>	
1.0236	2.3543	0.6875	2.0	2.0	43.5	76.3	<b>1838057/1838058</b>	
1.0625	1.9800	0.5600	3.5	1.3	26.0	30.0	<b>K-L 44649/K-L 44610</b>	
1.1250	2.2500	0.7813	3.5	1.5	47.3	55.0	<b>K-1988/K-1922</b>	
	2.4409	0.7500	3.5	1.3	48.4	57.0	<b>K-15112/K-15245</b>	
	2.5000	0.8125	3.5	1.5	48.4	57.0	<b>K-15112/K-15250</b>	
	2.5312	0.8438	1.5	1.5	49.5	61.0	<b>K-M 86647/K-M 86610</b>	
	2.6875	0.8750	0.8	1.5	58.3	69.5	<b>K-02474/K-02420</b>	
	1.1417	1.9800	0.5600	3.5	1.3	26.0	32.5	<b>331274</b>
1.1811	2.7170	0.7813	0.8	1.3	53.9	67.0	<b>K-14118/K-14276</b>	
	2.8380	0.8813	0.8	2.3	53.9	67.0	<b>K-14118/K-14283</b>	
1.1875	2.5312	0.8438	1.5	1.5	49.5	61.0	<b>K-M 86649/K-M 86610</b>	
	2.6875	0.8750	2.3	1.5	55.0	69.5	<b>K-M 88043/K-M 88010</b>	
	2.6875	0.8750	2.3	2.3	55.0	69.0	<b>K-M 88043/K-M 88011</b>	
1.1895	2.4409	0.7500	3.5	1.3	48.4	57.0	<b>K-15118/K-15245</b>	
	2.5000	0.8125	3.5	1.5	48.4	57.0	<b>K-15118/K-15250 X</b>	
1.2500	2.3280	0.6250	3.6	1.3	34.7	41.5	<b>K-LM 67048/K-LM 67010</b>	
	2.4409	0.7150	4.0	1.3	48.4	57.0	<b>K-15123/K-15245</b>	
	2.5000	0.7775	4.0	1.5	48.4	57.0	<b>K-15123/K-15250 X</b>	
	2.6150	1.0000	0.8	3.3	69.3	81.5	<b>K-2580/K-2520</b>	
	2.6875	0.8750	1.5	1.5	55.0	69.5	<b>K-M 88046/K-M 88010</b>	
	2.6875	0.8750	1.5	2.3	55.0	69.5	<b>K-M 88046/K-M 88011</b>	
	2.8593	1.1875	0.8	3.3	79.3	144.1	<b>3188 / 3120</b>	
	2.8750	1.1563	1.3	3.3	70.4	95.0	<b>K-HM 88452/K-HM 88510</b>	
	3.1250	1.0000	1.5	1.5	67.1	71.0	<b>K-43125/K-43312</b>	
	1.3125	2.6875	0.8750	0.8	1.5	55.0	69.5	<b>K-M 88048/K-M 88010</b>
2.6875		0.8750	0.8	2.3	55.0	69.5	<b>K-M 88048/K-M 88011</b>	
2.7170		0.7813	3.5	3.3	53.9	67.0	<b>K-14130/K-14274</b>	
2.7170		0.7813	3.5	1.3	53.9	67.0	<b>K-14130/K-14276</b>	
2.7500		0.9375	3.5	1.3	70.4	133.2	<b>2585/2523</b>	
2.8380		0.8813	3.5	2.3	53.9	67.0	<b>K-14130/K-14283</b>	
3.0000		1.1563	0.8	3.3	78.1	106.0	<b>K-HM 89443/K-HM 89410</b>	
3.1250		1.0000	3.5	1.5	67.1	71.0	<b>K-43131/K-43312</b>	
1.3750		2.5625	0.7100	3.6	1.3	47.3	57.0	<b>K-LM 484548/K-LM 48510</b>
		2.7170	0.7813	1.5	1.3	53.9	67.0	<b>K-14137 A/K-14276</b>
	2.7170	0.7813	3.5	1.3	53.9	67.0	<b>K-14138 A/K-14276</b>	
	2.7170	0.7813	1.5	3.3	53.9	67.0	<b>K-14137 A/K-14274</b>	
	2.7170	0.7813	3.5	3.3	53.9	67.0	<b>K-14138 A/K-14274</b>	

d	Dimensions				Load Rating		Designation
	inch				kN		
	D	B	r (mm)	r <sub>1</sub> (mm)	Dynamic (C)	Static (C <sub>0</sub> )	
	2.7170	1.0623	0.8	1.3	53.9	67.0	<b>K-14136 A/K-14276</b>
	2.7170	1.0623	0.8	3.3	53.9	67.0	<b>K-14136 A/K-14274</b>
	2.8380	0.8813	1.5	2.3	53.9	67.0	<b>K-14137 A/K-14283</b>
	2.8380	0.8813	3.5	2.3	53.9	67.0	<b>K-14138 A/K-14283</b>
	2.8380	1.1623	0.8	2.3	53.9	67.0	<b>K-14136 A/K-14283</b>
	2.8438	1.0000	2.3	2.3	67.1	90.0	<b>K-HM 88649/K-HM 88610</b>
	3.0000	0.8125	1.5	1.3	56.1	64.0	<b>K-28137/K-28300</b>
	3.0000	1.1563	3.5	3.3	78.1	106.0	<b>K-HM 89446/K-HM 89410</b>
	3.0000	1.1563	3.5	3.3	85.8	106.0	<b>K-31593/K-31520</b>
	3.0000	1.1563	1.5	3.3	85.8	106.0	<b>K-31594/K-31520</b>
	3.1250	1.1563	3.5	3.3	91.3	110.0	<b>K-3478/K-3420</b>
	3.1510	0.8438	1.5	1.5	56.1	64.0	<b>K-28137/K-28317</b>
	3.4375	1.1875	3.5	3.3	102.0	132.0	<b>K-3581/K-3525</b>
	2.8750	0.9375	1.5	0.8	72.1	88.0	<b>K-25877/K-25821</b>
	2.8750	0.9375	1.5	2.3	72.1	88.0	<b>K-25877/K-25820</b>
	2.8750	1.0625	3.5	1.5	73.7	88.0	<b>K-23690/K-23620</b>
1.3775	2.3280	0.6250	3.5	1.3	33.0	44.0	<b>K-L 68149/K-L 68110</b>
	2.3612	0.6250	3.5	1.3	33.0	44.0	<b>K-L 68149/K-L 68111</b>
1.4365	2.8750	0.9375	1.5	0.8	72.1	88.0	<b>K-25880/K-25821</b>
	2.8750	0.9375	1.5	2.3	72.1	88.0	<b>K-25880/K-25820</b>
	2.8750	0.9375	3.5	0.8	74.8	93.0	<b>K-2794/K-2735 X</b>
	3.0000	0.9375	3.5	3.3	74.8	93.0	<b>K-2794/K-2720</b>
1.4375	3.0000	1.1563	0.8	3.3	78.1	106.0	<b>K-HM 89448/K-HM 89410</b>
	3.0000	1.1563	3.5	3.3	78.1	106.0	<b>K-HM 89449/K-HM 894410</b>
	3.0000	1.1563	3.5	3.3	85.8	106.0	<b>K-31597/K-31520</b>
1.5000	2.5625	0.7100	2.3	1.3	42.9	57.0	<b>K-LM 29749/K-LM 29710</b>
	2.5625	0.7800	2.3	1.3	42.9	57.0	<b>K-LM 29749/K-LM 29711</b>
	2.8346	0.6700	1.5	2.0	42.9	51.0	<b>K-19150/K-19283 X</b>
	2.8346	0.7480	3.5	1.5	49.5	60.0	<b>K-16150/K-16283</b>
	2.8440	0.8125	3.5	1.3	49.5	60.0	<b>K-16150/K-16284</b>
	2.8440	0.9375	3.5	2.3	49.5	60.0	<b>K-16150/K-16283</b>
	2.8750	0.9375	3.5	0.8	74.8	93.0	<b>K-2788/K-2735 X</b>
	3.0000	0.8125	1.5	1.3	56.1	64.0	<b>K-28150/K-28300</b>
	3.0000	0.9375	3.5	0.8	74.8	93.0	<b>K-2788/K-2729</b>
	3.0000	0.9375	3.5	3.3	74.8	93.0	<b>K-2788/K-2720</b>
	3.1250	1.1563	3.5	3.3	91.3	110.0	<b>K-3490/K-3420</b>
	3.1510	0.8438	1.5	1.5	56.1	64.0	<b>K-28150/K-28317</b>
	3.2500	1.1563	0.8	3.3	85.8	118.0	<b>K-HM 801346/K-HM 801310</b>
	3.2500	1.1563	2.3	3.3	85.8	118.0	<b>K-HM 801346 X/K-HM 801310</b>
	3.4843	1.0625	3.5	1.5	101.0	114.0	<b>K-418/K-414</b>
1.5625	2.8750	0.9375	3.5	0.8	74.8	93.0	<b>K-2789/K-2735 X</b>

Dimensions					Load Rating		Designation
inch					kN		
d	D	B	r (mm)	r <sub>1</sub> (mm)	Dynamic (C)	Static (C <sub>0</sub> )	
	2.8750	1.0096	0.8	2.3	66.0	86.5	<b>K-M 201047/K-M 201011</b>
	3.0000	0.9375	3.5	0.8	74.8	93.0	<b>K-2789/K-2729</b>
	3.0000	0.9375	3.5	3.3	74.8	93.0	<b>K-2789/K-2720</b>
1.6137	2.7549	0.6890	3.6	1.5	44.0	58.5	<b>K-LM 300849/K-LM 300811</b>
1.6250	2.8750	0.6562	3.5	1.5	46.8	56.0	<b>K-18590/K-18520</b>
	2.8910	0.7700	3.5	0.8	55.0	69.5	<b>K-LM 501349/K-LM 501310</b>
	2.8910	0.8437	3.5	0.8	55.0	69.5	<b>K-LM 501349/K-LM 501314</b>
	2.8910	0.9060	3.5	2.3	55.0	69.5	<b>K-LM 501349/K-LM 501311</b>
	3.0000	0.7090	1.5	1.5	45.7	56.0	<b>K-11162/K-11300</b>
	3.0000	0.8750	3.5	0.8	68.2	86.5	<b>K-24780/K-24720</b>
	3.2500	1.0450	3.5	3.3	73.7	91.5	<b>K-M 802048/K-M 802011</b>
	3.4375	1.1875	1.5	3.3	102.0	132.0	<b>K-3585/K-3525</b>
	3.4375	1.1875	3.5	3.3	102.0	132.0	<b>K-3577/K-3525</b>
	3.4843	1.0625	3.5	1.5	101.0	114.0	<b>K-419/K-414</b>
	3.5000	1.1875	35.0	3.3	95.2	127.0	<b>K-HM 803146/K-HM 803110</b>
	3.7500	1.2188	1.5	0.8	88.0	96.5	<b>K-53162/K-53375</b>
	3.7500	1.2188	1.5	2.3	88.0	96.5	<b>K-53162/K-53370</b>
	3.8750	1.2188	1.5	1.5	88.0	96.5	<b>K-53162/K-53387 X</b>
	4.0000	1.3750	3.5	3.3	151.0	190.0	<b>K-526/K-522</b>
1.6875	3.4375	1.1875	3.5	3.3	102.0	132.0	<b>K-3579/K-3525</b>
1.6880	3.2650	0.9375	3.5	0.8	80.9	106.0	<b>K-25577/K-25520</b>
	3.2650	1.0625	3.5	2.3	80.9	106.0	<b>K-25577/K-25523</b>
	3.2700	0.9400	3.5	2.0	80.9	106.0	<b>K-25577/K-25522</b>
1.7500	2.8750	0.7188	1.5	1.5	48.4	67.0	<b>K-L 102849/K-L 102810</b>
	3.2650	0.9375	3.5	0.8	80.9	106.0	<b>K-25580/K-25520</b>
	3.2650	1.0586	3.5	2.3	80.9	106.0	<b>K-25580/K-25523</b>
	3.2700	0.9400	3.5	2.0	80.9	106.0	<b>K-25580/K-25522</b>
	3.4375	1.1875	3.5	3.3	102.0	132.0	<b>K-3578/K-3525</b>
	3.5000	1.1875	3.5	3.3	95.2	127.0	<b>K-HM 803149/K-HM 803110</b>
	3.5480	0.9055	3.5	2.3	70.4	81.5	<b>K-355 X/K-352</b>
	3.6250	1.1875	3.5	3.3	95.2	127.0	<b>LM 803149/LM 803112</b>
	3.6718	1.1875	3.5	3.3	110.0	146.0	<b>K-3782/K-3720</b>
1.7500	3.7500	1.0938	3.5	2.3	105.0	125.0	<b>K-438/K-432</b>
	3.7500	1.0938	0.8	0.8	105.0	137.0	<b>K-33885/K-33822</b>
	3.7500	1.2188	1.3	0.8	88.0	96.5	<b>K-53176/K-53375</b>
	3.7500	1.2188	1.3	2.3	88.0	96.5	<b>K-53176/K-53377</b>
	3.7500	1.2188	2.0	0.8	88.0	96.5	<b>K-53178/K-53375</b>
	3.7500	1.2188	2.0	2.3	88.0	96.5	<b>K-53178/K-53377</b>
	3.7500	1.2188	3.5	0.8	88.0	96.5	<b>K-53177/K-53375</b>
	3.7500	1.2188	3.5	0.8	101.0	122.0	<b>K-HM 903249/K-HM 903210</b>

Dimensions					Load Rating		Designation
inch					kN		
d	D	B	r (mm)	r <sub>1</sub> (mm)	Dynamic (C)	Static (C <sub>0</sub> )	
	3.8750	1.2188	1.3	1.5	88.0	96.5	<b>K-53176/K-53387 X</b>
	4.0000	1.3750	3.5	3.3	151.0	190.0	<b>K-527/K-522</b>
	4.2500	1.4375	3.5	3.3	151.0	190.0	<b>K-535/K-532 X</b>
	4.3750	1.5000	3.5	3.3	151.0	190.0	<b>K-535/K-532 A</b>
	4.7500	1.6250	3.5	3.3	168.0	212.0	<b>K-615/K-612</b>
1.7710	3.6718	1.1875	3.5	3.3	110.0	146.0	<b>K-3776/K-3720</b>
1.7712	3.3465	0.8125	2.0	1.5	70.4	81.5	<b>K-358 X/K-354 X</b>
	4.1333	0.9257	2.5	2.5	110.0	146.0	<b>K-HM 905843/K-HM 905810</b>
1.7812	3.0625	0.7812	3.5	0.8	53.9	69.5	<b>K-LM 603049/K-LM 603011</b>
1.7960	3.2650	0.9375	3.5	0.8	80.9	106.0	<b>K-25590/K-25520</b>
	3.2650	1.0625	3.5	2.3	80.9	106.0	<b>K-25590/K-25523</b>
	3.2700	0.9400	3.5	2.0	80.9	106.0	<b>K-25590/K-25522</b>
1.8105	2.9518	0.7087	2.3	1.5	50.1	71.0	<b>K-LM 503349/K-LM 503310</b>
	3.5817	1.2598	3.5	3.5	121.0	156.0	<b>K-HM 204049/K-HM 204010</b>
1.8125	3.1250	0.6875	2.8	1.5	49.5	62.0	<b>K-18690/K-18620</b>
	3.3465	0.8125	2.3	1.5	70.4	81.5	<b>K-359 S/K-354 X</b>
1.8750	3.8125	0.8268	0.8	0.8	80.9	102.0	<b>K-386 A/K-382 A</b>
	4.0000	1.3750	3.5	3.3	151.0	190.0	<b>K-528/K-522</b>
1.8750	4.0000	1.3750	8.0	3.3	151.0	190.0	<b>K-528 R/K-522</b>
	4.3750	1.1875	3.5	3.3	95.2	114.0	<b>K-55187/K-55437</b>
	4.4375	1.1875	3.5	3.3	95.2	114.0	<b>K-55187/K-55443</b>
1.9375	4.0625	0.9314	3.5	3.3	176.0	240.0	<b>K-5395/K-5335</b>
	4.1250	1.4375	3.5	3.3	145.0	204.0	<b>K-HM 807044/K-HM 807010</b>
1.9685	3.6718	1.1875	3.5	3.3	110.0	146.0	<b>50KW01/3720</b>
2.0000	3.3465	0.6875	3.5	1.5	50.1	65.5	<b>K-18790/K-18720</b>
	3.5000	0.8125	3.5	1.3	76.5	91.5	<b>K-368 A/K-362 A</b>
	3.5433	0.9843	3.5	2.0	76.5	91.5	<b>K-368 A/K-362 X</b>
	3.6250	0.9688	3.5	0.8	85.8	118.0	<b>K-28580/K-28521</b>
	3.6718	1.1875	3.5	3.3	110.0	146.0	<b>K-3780/K-3720</b>
	3.7500	1.0938	3.5	0.8	105.0	137.0	<b>K-33889/K-33822</b>
	3.8437	0.9688	3.5	0.8	89.7	129.0	<b>K-28678/K-28622</b>
	4.0000	1.3750	3.5	3.3	151.0	190.0	<b>K-529 X/K-522</b>
	4.1250	1.1688	3.5	3.3	157.0	224.0	<b>K-4580/K-4535</b>
	4.1250	1.1875	6.4	3.3	130.0	173.0	<b>K-45284/K-45220</b>
	4.1250	1.4375	3.5	3.3	145.0	204.0	<b>K-HM807046/K-HM 807010</b>
	4.2500	1.4375	3.5	3.3	151.0	190.0	<b>K-537/K-532 X</b>
	4.3750	1.1875	3.5	3.3	105.0	140.0	<b>K-HM907643/K-HM 907614</b>
	4.3750	1.1875	3.5	3.3	95.2	114.0	<b>K-55200/K-55437</b>
	4.3750	1.5000	3.5	3.3	151.0	190.0	<b>K-537/K-532 A</b>

d	Dimensions				Load Rating		Designation
	D	B	r (mm)	r <sub>1</sub> (mm)	Dynamic (C)	Static (C <sub>0</sub> )	
	4.4375	1.1875	3.5	3.3	95.2	114.0	<b>K-55200/K-55443</b>
	4.6250	1.3125	3.5	3.3	128.0	150.0	<b>K-66200/K-66462</b>
2.0625	3.6250	0.9688	0.8	3.5	85.8	118.0	<b>28584/28521</b>
2.1250	3.5000	0.7500	2.3	2.0	583.0	78.0	<b>K-LM 806649/K-LM 806610</b>
	3.7500	1.0938	1.5	0.8	105.0	137.0	<b>K-33895/K-33822</b>
	4.1250	1.4375	3.5	3.3	145.0	204.0	<b>K-HM 807049/K-HM 807010</b>
2.1250	4.2500	1.4375	3.5	3.3	151.0	190.0	<b>K-539/K-532 X</b>
	4.3750	1.5000	3.5	3.3	151.0	190.0	<b>K-539/K-532 A</b>
	4.7500	1.6250	3.5	3.3	168.0	212.0	<b>K-621/K-612</b>
	4.8750	1.4375	3.3	3.5	157.6	291.0	<b>CK 72212/2/SK 72487/3</b>
	5.0000	1.7500	3.5	3.3	209.0	275.0	<b>K-65212/K-65500</b>
2.1875	3.8437	0.9688	3.5	3.5	89.7	129.0	<b>K-28680/K-28622</b>
	4.8125	1.7188	1.3	1.3	201.0	305.0	<b>K-5566/K-5535</b>
2.2500	3.8125	0.8268	2.3	0.8	80.9	102.0	<b>K-387/K-382 A</b>
	3.8125	0.8268	3.5	0.8	80.9	102.0	<b>K-387 A/K-382 A</b>
	3.8125	0.8268	5.0	0.8	80.9	102.0	<b>K-387 AS/K-382 A</b>
	3.8125	1.0000	2.3	2.3	80.9	102.0	<b>K-387/K-382 S</b>
	3.8125	1.0000	3.5	2.3	80.9	102.0	<b>K-387 A/K-382 S</b>
	3.8125	1.0000	5.0	2.3	80.9	102.0	<b>K-387 AS/K-382 S</b>
	3.8437	0.9688	3.5	0.8	89.7	129.0	<b>K-28682/K-28622</b>
	3.8750	0.8268	2.3	0.8	80.9	102.0	<b>K-387/K-382</b>
	3.8750	0.8268	3.5	0.8	80.9	102.0	<b>K-387 A/K-382</b>
	3.8750	0.8268	5.0	0.8	80.9	102.0	<b>K-387 AS/K-382</b>
	3.9370	0.8268	2.3	2.0	80.9	102.0	<b>K-387/K-383 A</b>
	3.9370	0.8268	3.5	2.0	80.9	102.0	<b>K-387 A/K-383 A</b>
	3.9370	0.8268	5.0	2.0	80.9	102.0	<b>K-387 AS/K-383 A</b>
	4.1250	1.1875	2.3	3.3	121.0	160.0	<b>K-462/K-453 X</b>
	4.2500	1.0938	2.3	2.3	121.0	160.0	<b>K-462/K-453 AS</b>
	4.4375	1.1875	8.0	3.3	142.0	204.0	<b>K-39581/K-39520</b>
	4.4375	1.1875	3.5	3.3	142.0	204.0	<b>K-39580/K-39520</b>
	4.7238	1.2894	3.5	0.8	142.0	204.0	<b>K-39580/K-39528</b>
	4.7500	1.6250	3.5	3.3	212.0	186.0	<b>K-623/K-612</b>
	5.0000	1.7500	3.5	3.3	209.0	275.0	<b>K-65225/K-65500</b>
2.2650	3.8125	0.8268	3.5	0.8	80.9	102.0	<b>K-388 A/K-382 A</b>
	3.8125	1.0000	3.5	2.3	80.9	102.0	<b>K-388 A/K-382 S</b>
	3.8750	0.8268	3.5	0.8	80.9	102.0	<b>K-388 A/K-382</b>
	3.9370	0.8268	3.5	2.0	80.9	102.0	<b>K-388 A/K-383 A</b>
2.3750	3.9370	1.0000	3.5	3.3	85.8	125.0	<b>K-28985/K-28921</b>
	4.0000	1.0000	3.5	3.3	85.8	125.0	<b>K-28985/K-28920</b>
	5.0000	1.4375	3.5	1.5	165.0	236.0	<b>K-HM 813841/K-HM 813811</b>

Dimensions					Load Rating		Designation
inch					kN		
d	D	B	r (mm)	r <sub>1</sub> (mm)	Dynamic (C)	Static (C <sub>0</sub> )	
	5.0000	1.7500	3.5	3.3	209.0	275.0	<b>K-65237/K-65500</b>
	5.1250	1.4375	5.0	3.3	151.0	180.0	<b>K-HM 9112245/K-HM 911210</b>
2.4375	5.3750	1.8125	3.5	3.3	229.0	375.0	<b>K-H 715334/K-H 715311</b>
	5.7500	1.6250	3.5	3.3	198.0	236.0	<b>K-H 913842/K-H 913810</b>
	5.7500	1.6250	7.0	3.3	198.0	236.0	<b>K-H 913843/K-H 913810</b>
2.5000	4.1250	0.8438	2.0	2.0	85.8	112.0	<b>K-39250/K39412</b>
	4.2500	1.0000	3.5	3.3	89.7	137.0	<b>K-29585/K-29520</b>
	4.3307	0.8661	3.5	1.3	88.0	118.0	<b>K-395/K-394 A</b>
	4.4375	1.1875	3.5	3.3	142.0	204.0	<b>K-39585/K-39520</b>
	4.4375	1.1875	3.5	3.3	123.0	183.0	<b>K-3982/K-3920</b>
	4.8750	1.5000	3.5	3.3	173.0	240.0	<b>K-559/K-552 A</b>
	5.1181	1.4646	3.0	3.6	194.3	370.0	<b>565XL/562SL</b>
2.5625	5.3447	2.1250	3.5	3.3	286.0	400.0	<b>K-6379/K-6320</b>
2.5979	4.8809	1.6339	7.0	3.5	224.0	310.0	<b>K-H 212749/K-H 212710</b>
2.6250	4.3307	0.8661	0.8	1.3	88.0	118.0	<b>K-395 A/K-394 A</b>
	4.3307	0.8661	3.5	1.3	88.0	118.0	<b>K-395 S/K-394 A</b>
	4.3307	1.0000	3.5	1.3	89.7	137.0	<b>K-29590/K-29521</b>
	4.4375	1.1875	3.5	3.3	123.0	183.0	<b>K-3984/K-3920</b>
	4.4375	1.1875	3.5	0.8	123.0	183.0	<b>K-3984/K-3925</b>
	4.4375	1.1875	3.5	3.3	142.0	204.0	<b>K-39590/K-39520</b>
	4.6250	1.1875	3.5	3.3	123.0	190.0	<b>K-33262/K-33462</b>
2.6250	4.7244	1.1730	3.5	0.8	123.0	190.0	<b>K-33262/K-33472</b>
	4.8750	1.5000	3.5	3.3	172.0	240.0	<b>K-560/K-552 A</b>
	5.3447	2.1250	4.3	3.3	286.0	400.0	<b>K-6386/K-6320</b>
	5.3750	1.6250	3.5	3.3	194.0	260.0	<b>K-641/K-632</b>
2.6875	4.3307	0.8661	2.3	1.3	88.0	118.0	<b>K-399 A/K-394 A</b>
	5.3750	1.8125	3.5	3.3	229.0	375.0	<b>K-H 715343/K-H 715311</b>
	6.3750	1.9375	3.5	3.3	260.0	335.0	<b>K-9278/K-9220</b>
2.7500	3.9062	0.6693	1.5	1.5	46.8	76.5	<b>K-LL 713149/K-LL 713110</b>
	4.4375	1.0000	1.5	3.3	99.0	156.0	<b>K-29675/K-29620</b>
	4.6250	1.1875	3.5	3.3	123.0	190.0	<b>K-33275/K-33462</b>
	4.7244	1.1730	3.5	0.8	123.0	190.0	<b>K-33275/K-33472</b>
	4.7244	1.1730	3.5	2.0	132.0	186.0	<b>K-482/K-472</b>
	4.7244	1.2813	3.5	3.3	154.0	228.0	<b>K-47487/K-47420</b>
	4.8750	1.1875	3.5	3.3	132.0	186.0	<b>K-482/K-472 X</b>
	5.0000	1.4375	3.5	3.3	176.0	255.0	<b>K-566/K-563</b>
2.7559	4.7244	1.1730	2.0	2.0	132.0	186.0	<b>K-484/K-472</b>
2.8125	4.6250	1.1875	3.5	3.3	123.0	190.0	<b>K-33281/K-33462</b>
	4.7244	1.1730	3.5	0.8	123.0	190.0	<b>K-33281/K-33472</b>
	4.7244	1.2813	3.5	3.3	154.0	228.0	<b>K-47490/K-47420</b>

Dimensions					Load Rating		Designation
inch					kN		
d	D	B	r (mm)	r <sub>1</sub> (mm)	Dynamic (C)	Static (C <sub>0</sub> )	
	5.0000	1.4375	3.5	1.5	165.0	236.0	<b>K-HM 813849/K-813811</b>
	5.3750	1.6250	6.4	3.3	194.0	260.0	<b>K-645/K-632</b>
	5.3750	1.6250	3.5	3.3	224.0	290.0	<b>K-H 414249/K-H 414210</b>
	5.3750	1.8125	3.5	3.3	229.0	375.0	<b>K-H 715345/K-H 715311</b>
2.8750	4.4375	1.0000	3.5	3.3	99.0	156.0	<b>K-29685/K-29620</b>
	4.6250	1.1875	3.5	3.3	123.0	190.0	<b>K-33287/K-33462</b>
	4.7244	1.1730	3.5	0.8	123.0	190.0	<b>K-33287/K-33472</b>
	5.0000	1.4375	3.5	3.3	176.0	255.0	<b>K-567/K-563</b>
	5.0000	1.4375	4.8	3.3	176.0	255.0	<b>K-567 X/K-563</b>
3.0000	4.3125	0.7500	1.5	1.5	58.3	102.0	<b>K-L 814749/K-L 814710</b>
	5.0000	1.1875	3.5	3.3	138.0	204.0	<b>K-42687/K-42620</b>
	5.0000	1.1875	6.4	3.3	138.0	204.0	<b>K-42688/K-42620</b>
	5.2500	1.1875	6.4	3.3	145.0	220.0	<b>K-495 AX/K-492 A</b>
	5.2500	1.1875	3.5	3.3	145.0	220.0	<b>K-495 A/K-492 A</b>
	5.2500	1.3125	6.4	3.3	165.0	260.0	<b>K-47678/K-47620</b>
	5.3750	1.1875	3.5	3.3	145.0	220.0	<b>K-495 A/K-493</b>
	5.3750	1.1875	6.4	3.3	145.0	220.0	<b>K-495 AX/K-493</b>
	5.5000	1.4375	3.5	3.3	187.0	280.0	<b>K-575/K-572 X</b>
	5.5115	1.4375	3.5	3.3	187.0	280.0	<b>K-575/K-572</b>
	5.7500	1.6250	3.5	3.3	220.0	320.0	<b>K-659/K-653</b>
	5.9090	1.7500	3.5	3.3	286.0	405.0	<b>K-748 S/K-742</b>
	6.0000	1.6250	3.5	3.3	220.0	320.0	<b>K-659/K-652</b>
	6.3750	1.9375	3.5	3.3	260.0	335.0	<b>K-9285/K-9220</b>
3.0625	4.6250	1.0000	3.5	3.3	101.0	163.0	<b>K-LM 814849/K-LM 814810</b>
3.1875	5.2500	1.1875	3.5	3.3	145.0	220.0	<b>K-496/K-492 A</b>
	5.3750	1.1875	3.5	3.3	145.0	220.0	<b>K-496/K-493</b>
3.2500	4.9375	1.0000	3.5	1.5	112.0	186.0	<b>K-27687/K-27620</b>
	5.2500	1.1875	3.5	3.3	145.0	220.0	<b>K-495/K-492 A</b>
	5.2500	1.3125	3.5	3.3	165.0	260.0	<b>K-47686/K-47620</b>
	5.3750	1.1875	3.5	3.3	145.0	220.0	<b>K-495/K-493</b>
	5.5000	1.4375	3.5	3.3	187.0	280.0	<b>C-580/K-572 X</b>
	5.5115	1.4375	3.5	3.3	187.0	280.0	<b>K-580/K-572</b>
	5.5115	1.4375	6.8	3.3	187.0	280.0	<b>K-582/K-572</b>
	5.7500	1.6250	3.5	3.3	220.0	320.0	<b>K-663/K-653</b>
	5.9090	1.7500	3.5	3.3	286.0	405.0	<b>K-749 A/K-742</b>
	6.0000	1.6250	3.5	3.3	220.0	320.0	<b>K-663/K-652</b>
3.2813	4.9375	1.0000	3.5	1.5	112.0	186.0	<b>K-27690/K-27620</b>
3.3125	5.2500	1.1875	3.5	3.3	145.0	220.0	<b>K-498/K-492 A</b>
	5.3750	1.1875	3.5	3.3	145.0	220.0	<b>K-498/K-493</b>
3.3475	5.9090	1.7500	3.5	3.3	286.0	405.0	<b>K-749/K-742</b>

Dimensions					Load Rating		Designation
inch					kN		
d	D	B	r (mm)	r <sub>1</sub> (mm)	Dynamic (C)	Static (C <sub>0</sub> )	
3.3750	5.2500	1.1875	3.5	3.3	145.0	220.0	<b>K-497/K-492 A</b>
	5.3750	1.1875	3.5	3.3	145.0	220.0	<b>K-497/K-493</b>
	5.5960	1.6875	4.8	3.0	224.0	375.0	<b>K-H 617049/K-H 617010</b>
	5.7500	1.6250	3.5	3.3	220.0	320.0	<b>K-665/K-653</b>
	5.9858	1.6250	3.5	3.3	220.0	320.0	<b>K-665/K-652</b>
3.5000	6.0000	1.5625	3.5	3.3	194.0	305.0	<b>K-593/K-592 A</b>
	6.0000	1.5625	6.4	3.3	242.0	355.0	<b>K-HM 518445/K-HM518410</b>
	6.3750	1.8750	3.5	3.3	275.0	390.0	<b>K-759/K-752</b>
	6.3750	2.1250	3.5	3.3	330.0	510.0	<b>K-6580/K-6535</b>
3.5423	5.7864	1.5748	7.0	3.5	229.0	355.0	<b>K-HM 218248/K-HM 218210</b>
	6.3750	2.1250	3.0	3.3	330.0	510.0	<b>K-6581 X/K-6535</b>
3.6250	5.7500	1.3125	3.5	3.3	165.0	270.0	<b>K-47890/K-47820</b>
	5.9055	1.4170	6.4	3.0	194.0	305.0	<b>K-598 A/K-593 X</b>
	6.0000	1.5625	3.5	3.3	194.0	305.0	<b>K-598 /K-592 A</b>
	6.0000	1.5625	6.4	3.3	194.0	305.0	<b>K-598 A/K-592 A</b>
3.6875	5.8437	1.1250	3.0	3.0	130.0	196.0	<b>K-42368/K-42584</b>
3.7500	5.0625	0.6250	1.5	1.5	98.3	95.0	<b>K-LL 319349/K-LL 319310</b>
	5.7500	1.3125	3.5	3.3	165.0	270.0	<b>K-47896/K-47820</b>
	6.0000	1.5625	3.5	3.3	194.0	305.0	<b>K-594/K-592 A</b>
	6.0000	1.5625	5.0	3.3	194.0	305.0	<b>K-594 A/K-592 A</b>
	6.6250	1.6250	3.5	3.3	233.0	365.0	<b>K-683/K-672</b>
3.8125	5.8437	1.1250	3.5	3.0	130.0	196.0	<b>K-42381/K-42584</b>
3.9360	6.1801	1.6535	8.0	3.5	246.0	400.0	<b>K-HM 220149/K-HM 220110</b>
4.0000	6.1875	1.4375	3.5	3.3	201.0	335.0	<b>K-52400/K-52618</b>
	6.1875	1.4375	8.0	3.3	201.0	335.0	<b>K-52401/K-52618</b>
	6.6250	1.6250	3.5	3.3	233.0	365.0	<b>K-687/K-672</b>
	7.5000	2.2500	8.0	3.3	402.0	600.0	<b>K-861/K-854</b>
	7.5000	2.2500	8.0	3.3	440.0	630.0	<b>K-HH 221449/K-HH 221410</b>
4.1250	7.1250	1.8750	3.5	3.3	308.0	480.0	<b>K-782/K-772</b>
4.1875	6.5000	1.4375	3.5	3.3	209.0	355.0	<b>K-56418/K-56650</b>
4.2500	6.2500	0.9063	3.5	3.3	101.0	163.0	<b>K-37425/K-37625</b>
	6.3750	1.3750	3.5	3.3	183.0	320.0	<b>K-48190/K-48120</b>
	6.5000	1.4375	3.5	3.3	209.0	355.0	<b>K-56425/K-56650</b>
4.5000	7.0000	1.6250	3.5	3.3	251.0	415.0	<b>K-64450/K-64700</b>
	7.1250	1.3750	3.5	3.3	183.0	280.0	<b>K-68450/K-68712</b>
	7.5000	1.8750	3.5	3.3	319.0	520.0	<b>K-71450/K-71750</b>
	8.3750	2.6250	7.0	3.3	512.0	765.0	<b>K-938/K-932</b>
4.5266	7.0000	1.6250	9.0	3.3	251.0	415.0	<b>K-64452/K-64700</b>
4.6250	7.1250	1.3750	3.5	3.3	183.0	280.0	<b>K-68462/K-68712</b>

Dimensions					Load Rating		Designation
inch					kN		
d	D	B	r (mm)	r <sub>1</sub> (mm)	Dynamic (C)	Static (C <sub>0</sub> )	
4.7500	7.5000	1.8125	3.5	1.5	314.0	540.0	<b>K-HM 624749/K-HM 624710</b>
5.0000	6.6875	1.0000	1.5	1.5	132.0	265.0	<b>K-L 225849/K-L 225810</b>
	7.1875	1.5625	3.5	3.3	229.0	440.0	<b>K-48290/K-48220</b>
	7.7500	1.8125	3.5	3.3	319.0	585.0	<b>K-67388/K-37322</b>
	9.0000	2.1250	3.5	3.3	418.0	620.0	<b>K-HM 926747/K-HM 926710</b>
5.2500	7.7500	1.8125	3.5	3.3	319.0	585.0	<b>K-67390/K-37322</b>
	9.2500	2.5000	9.7	3.3	550.0	900.0	<b>K-95525/K-95625</b>
	9.2500	2.5000	4.8	3.3	550.0	900.0	<b>K-95528/K-95925</b>
5.3750	7.5000	1.5625	5.5	3.3	246.0	500.0	<b>K-48393/K-48320</b>
5.7500	7.6250	1.1250	1.5	1.5	176.0	360.0	<b>K-36690/K-36620</b>
	7.6250	1.1250	4.8	1.5	176.0	360.0	<b>K-36691/K-36620</b>
6.0000	10.0000	2.6250	7.0	3.3	583.0	980.0	<b>K-99600/K-99100</b>
6.2500	8.8750	1.6250	3.5	3.3	264.0	585.0	<b>K-46780/K-46720</b>
6.5000	8.8750	1.6250	3.5	3.3	264.0	585.0	<b>K-46790/K-46720</b>
	13.2480	3.6250	3.3	6.4	1120.0	1700.0	<b>K-HH 437549/K-HH 437510</b>
7.0000	10.2500	2.1250	3.5	3.3	484.0	900.0	<b>K-M 236849/K-M 236810</b>
7.0313	10.4375	2.0313	3.3	3.3	495.0	880.0	<b>K-M 336948/K-M 336912</b>
7.0840	10.4378	2.0313	3.3	3.3	495.0	880.0	<b>K-M 336949/K-M 336912</b>
7.5000	10.5000	1.8750	3.5	3.3	374.0	800.0	<b>K-67885/K-67820</b>
	11.1250	2.0000	3.5	3.3	402.0	695.0	<b>K-87750/K-87111</b>
7.8750	10.8750	1.6875	3.5	3.3	391.0	780.0	<b>K-LM 241147/K-LM 241110</b>
8.0000	11.1250	1.8125	3.5	3.3	380.0	830.0	<b>K-67983/K-67920</b>
8.0310	10.8750	1.6796	3.5	3.3	391.0	780.0	<b>K-LM 241148/K-LM 241110</b>
8.1250	11.1250	1.8125	3.5	3.3	380.0	830.0	<b>K-67985/K-67920</b>
	13.2500	3.8750	3.3	3.3	1140.0	2160.0	<b>K-H 242649/K-H 242610</b>
8.5000	11.2500	1.8125	3.5	3.3	352.0	780.0	<b>K-LM 742749/K-LM 742710</b>
8.5200	11.2500	1.8125	3.5	3.3	352.0	780.0	<b>K-LM 742747/K-LM 742710</b>
8.5320	11.2500	1.8125	3.5	3.3	352.0	780.0	<b>K-LM 742747 A/K-LM 742710</b>
8.6660	12.5000	1.8750	3.3	3.3	523.0	980.0	<b>K-LM 245832/K-LM 245810</b>
8.6960	12.5000	1.8750	3.3	3.3	523.0	980.0	<b>K-LM 245833/K-LM 245810</b>
9.0606	12.5000	1.8750	3.3	3.3	523.0	980.0	<b>K-LM 245846/K-LM 245810</b>
9.1250	12.5000	1.8750	3.3	3.3	523.0	980.0	<b>K-LM 245848/K-LM 245810</b>
10.1250	13.5000	2.2500	6.4	3.3	660.0	1400.0	<b>K-M 349549/K-M 349510</b>
10.3750	12.8125	1.1250	1.5	1.5	220.0	550.0	<b>K-38880/K-38820</b>
10.4331	14.0000	2.2500	3.5	3.3	644.0	1400.0	<b>K-LM 451347/K-LM 451310</b>
10.5000	14.0000	2.2500	3.5	3.3	644.0	1400.0	<b>K-LM 451349/K-LM 451310</b>

Dimensions					Load Rating		Designation
inch					kN		
d	D	B	r (mm)	r <sub>1</sub> (mm)	Dynamic (C)	Static (C <sub>0</sub> )	
13.0000	19.0000	3.3750	6.4	3.3	1210.0	2500.0	<b>K-EE 526130/K-526190</b>
13.5100	17.7500	2.6250	8.4	3.5	935.0	2200.0	<b>K-LM 361649 A/K-LM 361610</b>
15.0000	18.8750	1.9375	6.4	3.3	594.0	1500.0	<b>K-L 865547/K-L 865512</b>
16.0000	30.0000	7.1250	12.7	12.7	3690.0	6100.0	<b>K-H 969249/K-H 969210</b>
17.6250	25.0000	4.7500	6.4	6.4	2380.0	5500.0	<b>K-M 270749/K-M 270710</b>
19.0000	24.9950	3.1875	6.4	3.3	1470.0	3650.0	<b>K-EE 243190/K-243250</b>
19.6250	24.9950	3.1875	6.4	3.3	1470.0	3650.0	<b>K-EE 243196/K-243250</b>
20.5000	29.0000	3.5000	6.4	3.3	1650.0	3350.0	<b>K-EE 982051/K-982900</b>
21.1250	29.9950	5.7500	6.4	6.4	3360.0	8000.0	<b>K-M 276449/K-M 276410</b>
22.0000	29.0000	3.4688	6.4	6.4	1830.0	4150.0	<b>K-EE 843220/K-843290</b>
22.0000	29.0000	4.1250	6.4	6.4	2330.0	5700.0	<b>K-LM 377449/K-LM 377410</b>
24.0000	31.0000	3.6875	6.4	6.4	2160.0	5300.0	<b>K-EE 649240 AS/K-649310</b>
27.0000	34.5000	3.6875	6.4	6.4	2120.0	5500.0	<b>K-EE 655270/K-655345</b>
29.9183	35.0000	2.7500	3.3	3.3	1230.0	3800.0	<b>K-LL 483448/K-LL 483418</b>
	35.0000	3.5000	3.3	3.3	1940.0	6200.0	<b>K-L 183448/K-L 133410</b>
30.0000	35.0000	2.7500	3.3	3.3	1230.0	3800.0	<b>K-LL 483449/K-LL 483418</b>
	35.0000	3.5000	3.3	3.3	1940.0	6200.0	<b>K-L 183449/K-L 183410</b>
31.5625	36.0000	2.3125	3.5	3.3	1100.0	3550.0	<b>K-LL 584449/K-LL 584410</b>